



Grip Data



DIA.	GRIP NO.	RANGE	L MAX	F MAX
3/32	32	.020-.125	.250	.350
	34	.126-.250	.375	.475
	36	.251-.375	.500	.600
1/8	41	.020-.062	.212	.332
	42	.063-.125	.275	.395
	43	.126-.187	.337	.457
	44	.188-.250	.400	.520
	45	.251-.312	.462	.582
	46	.313-.375	.525	.645
	48	.376-.500	.650	.770
	410	.501-.625	.775	.895
5/32	52	.020-.125	.300	.440
	53	.126-.187	.362	.502
	54	.188-.250	.425	.565
	56	.251-.375	.550	.690
	58	.376-.500	.675	.815
	510	.501-.625	.800	.940
3/16	62	.020-.125	.325	.485
	63	.126-.187	.387	.547
	64	.188-.250	.450	.610
	66	.251-.375	.575	.735
	68	.376-.500	.700	.860
	610	.501-.625	.825	.985
	612	.626-.750	.950	1.110
	614	.751-.875	1.075	1.235
	616	.876-1.000	1.200	1.360
	618	1.001-1.125	1.325	1.485
1/4	82	.020-.125	.375	.555
	84	.126-.250	.500	.680
	86	.251-.375	.625	.805
	88	.376-.500	.750	.930
	810	.501-.625	.875	1.055
	812	.626-.750	1.000	1.180
	814	.751-.875	1.125	1.305
	816	.876-1.000	1.250	1.430
	818	1.001-1.125	1.375	1.555
	820	1.126-1.250	1.500	1.680

BLIND RIVETS



Domed Head

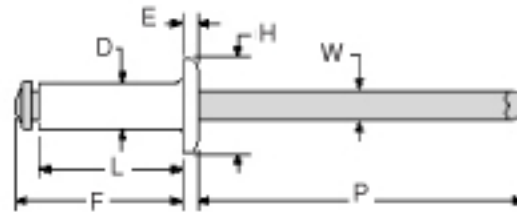

Large Flange

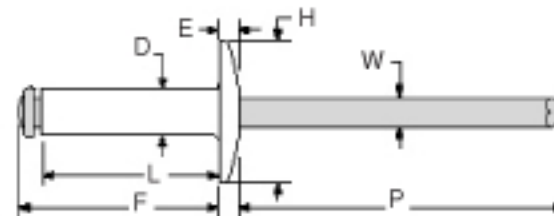

120° Flush Head*

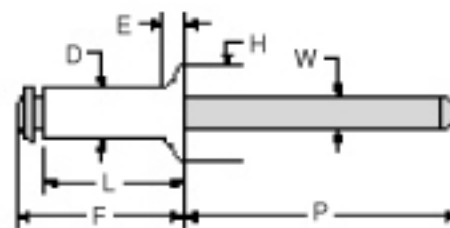

*Dimensional data not pictured

Handy Rivet Gauge (manufacturers rivet sizes may vary)

